


GDF - Hydrophobic PTFE Membrane Pleated Filter Cartridges

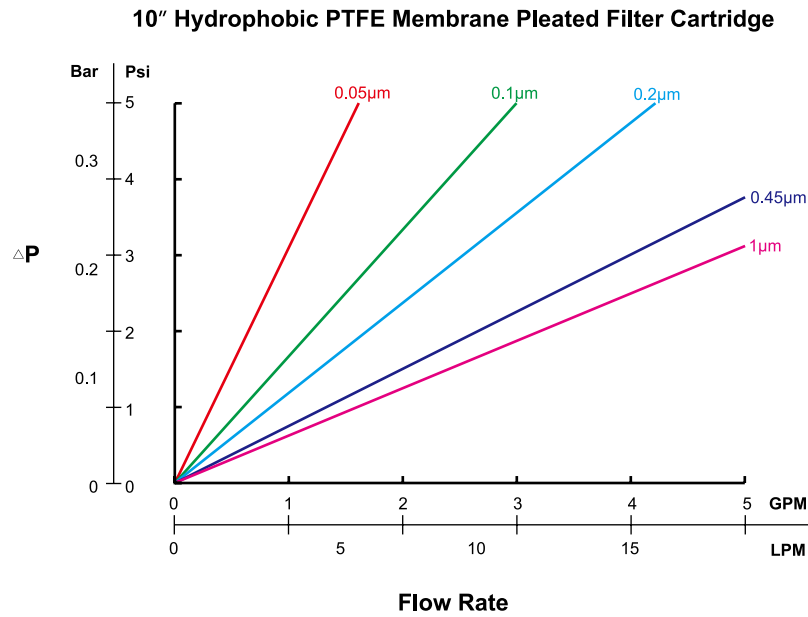

Sterilization

Autoclave or in situ steam : 121°C (250°F) for 30 minutes at 1.0 bar (14 psi)

Ordering Information

Type	Micron Rating	Filter Media	Nominal Length (inch)	Gasket/O-ring Option	End Cap Option
GD Pleated Membrane Filter Cartridge	0X5 – 0.05 µm	F Hydrophobic PTFE	10 - 10"	S -Silicone E -EPDM V -Viton W -Teflon encapsulated Viton	0 :Flat Gasket Double Open End 5 :2-222 O-ring with Flat End 6 :2-226 O-ring with Flat End 8 :2-222 O-ring with Fin 9 : 2-226 O-ring with Fin
	01 – 0.1 µm		20 - 20"		
	02 – 0.2 µm		30 - 30"		
	0H – 0.45 µm		40 - 40"		
	1 – 1 µm		Other Customized Sizes		
GD Pleated Membrane Filter Cartridge	02 0.2µm	F Hydrophobic PTFE	10 10"	S Silicon O-ring	0 Flat Gasket Double Open End